

1/10


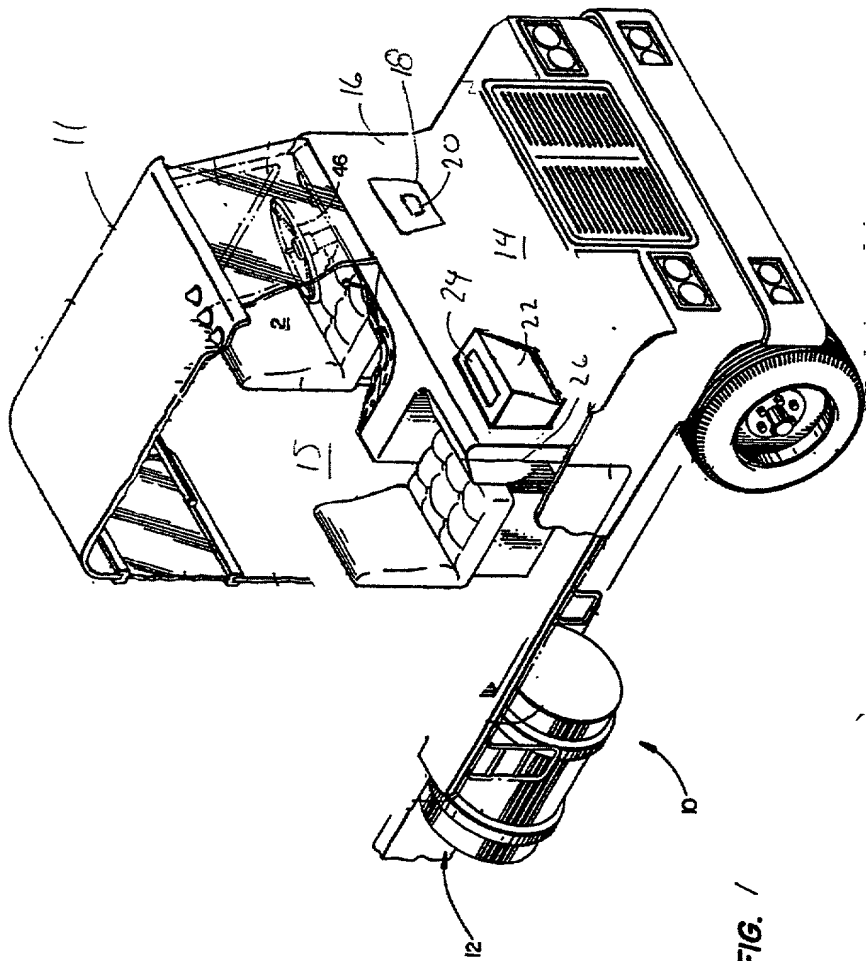


FIG. 1

2/10

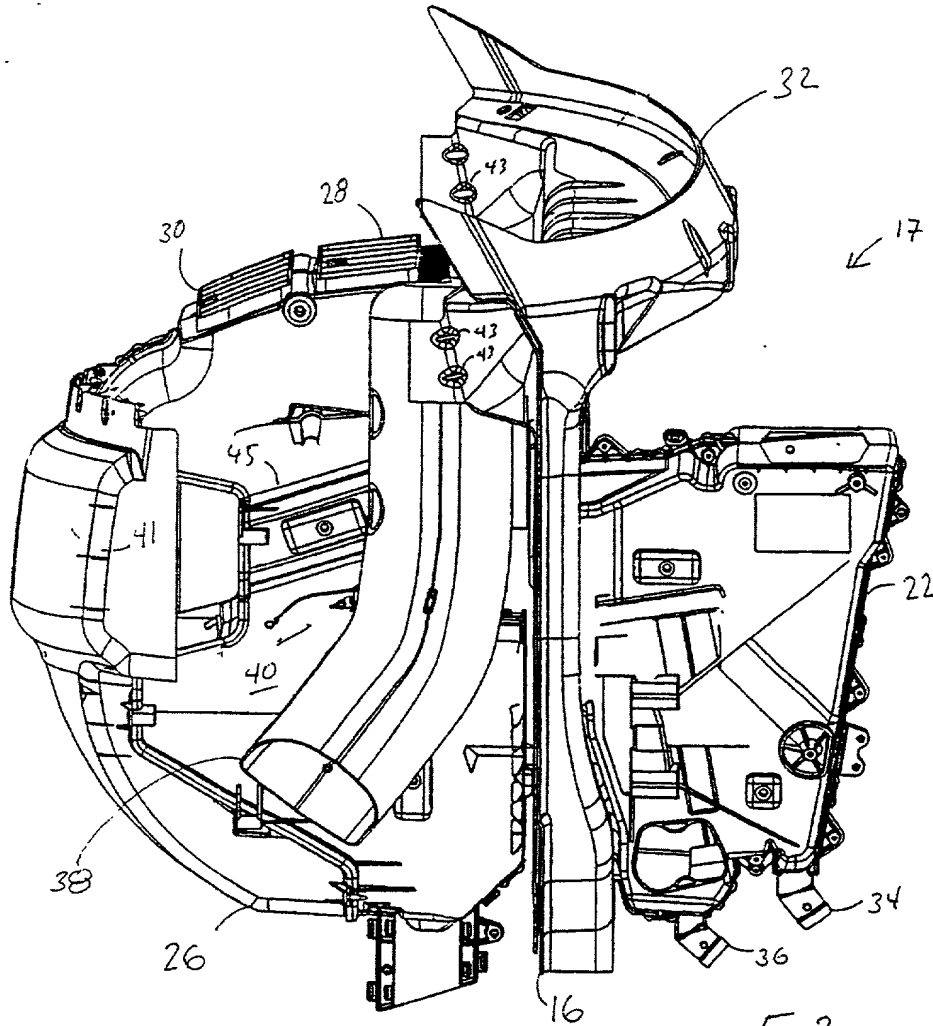

3/10


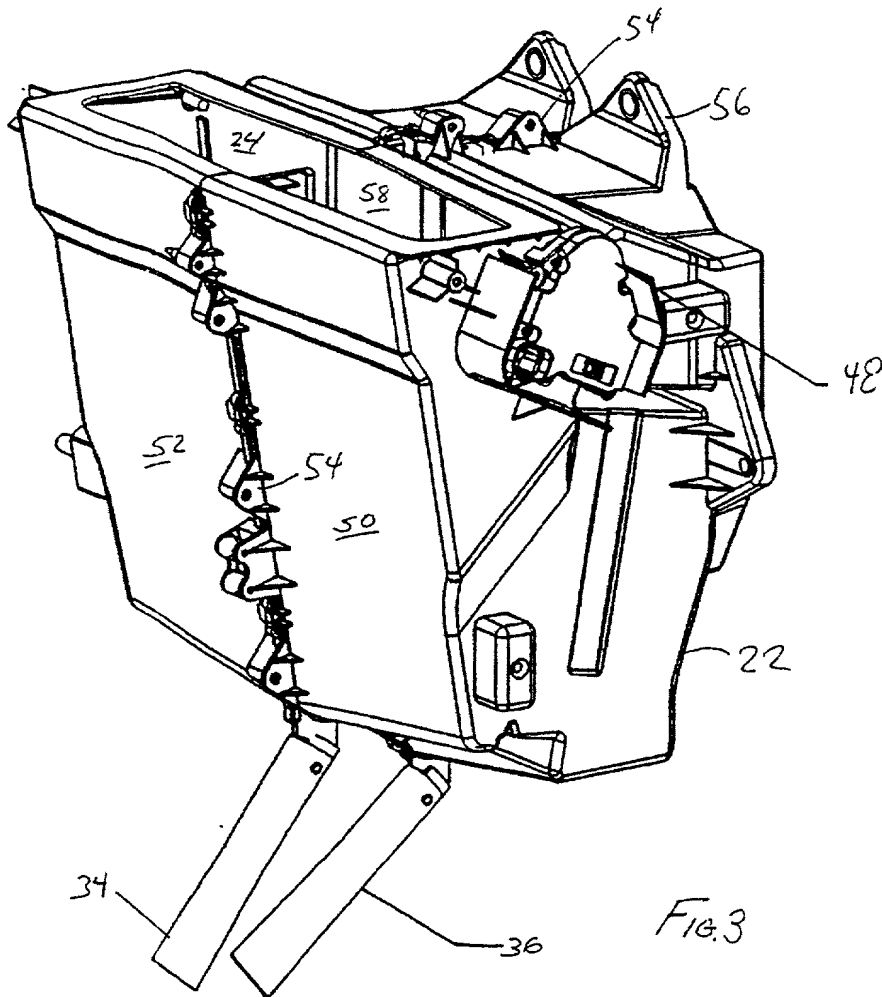


Fig. 3

40079738 0001 00

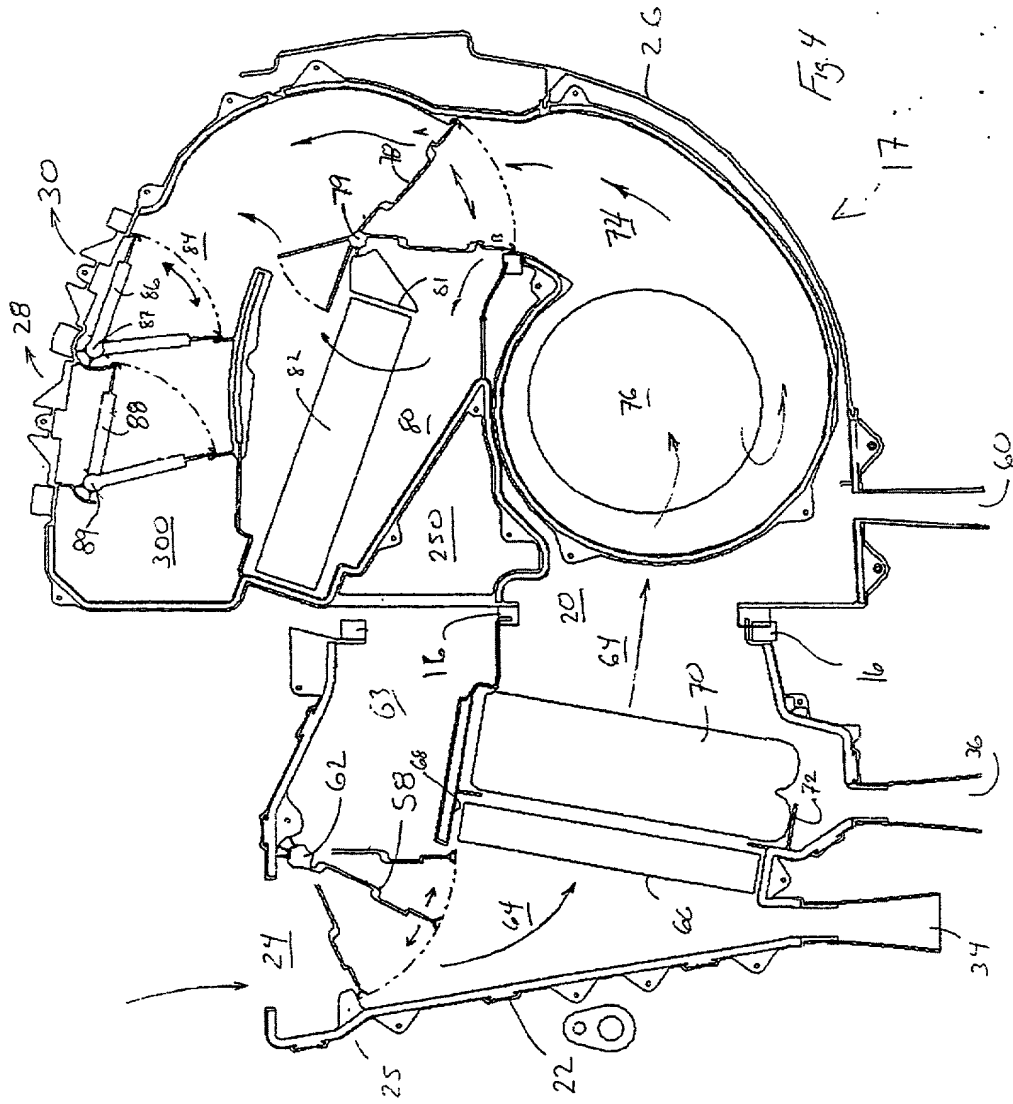

10074738.000100

5/12

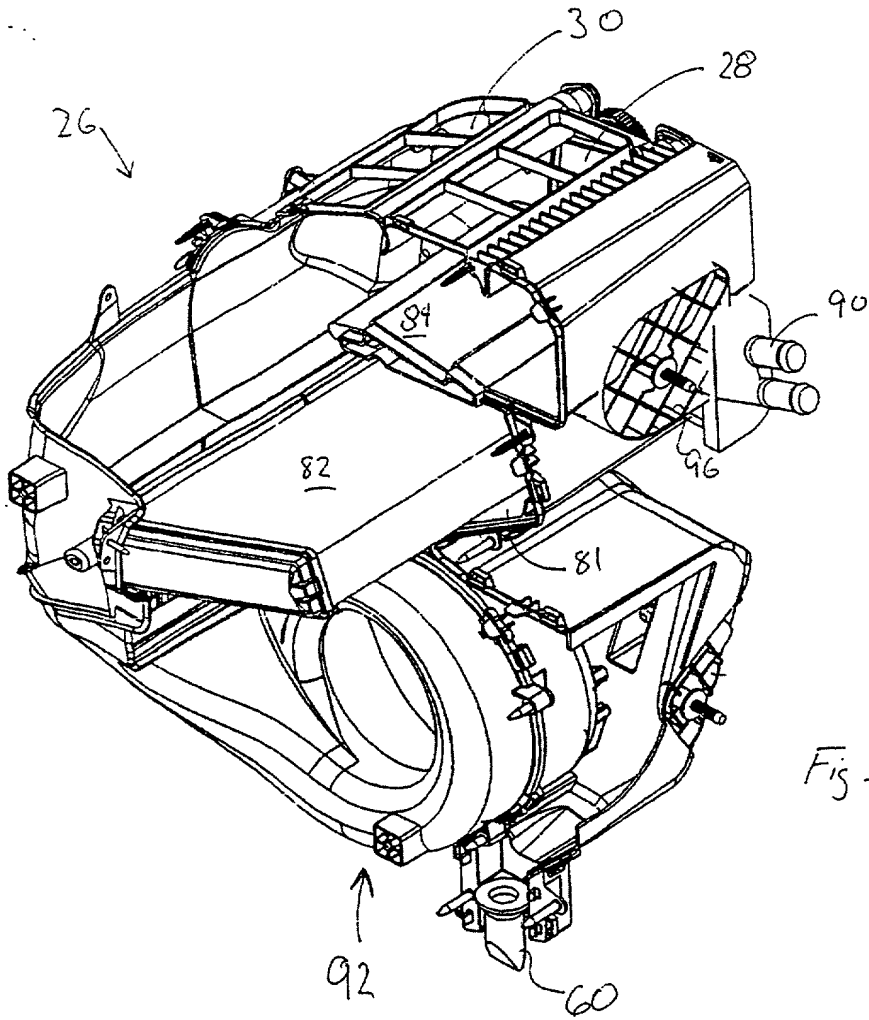


Fig 5

This diagram shows an exploded perspective view of a mechanical assembly. The components are labeled with reference numerals: 87, 104, 105, 107, 101, 103, 108, 106, 102, 100, and 98. The assembly includes a main housing (100) with a circular feature (108) and a rectangular label (106). A central shaft or rod (102) passes through the assembly. A gear or sprocket (105) is mounted on the shaft. A bracket or arm (104) is attached to the gear. A cable or hose (98) is connected to the assembly. A small component (107) is also visible near the gear. The drawing is a technical sketch with dashed lines indicating the assembly path.

FIG 6A

7/10


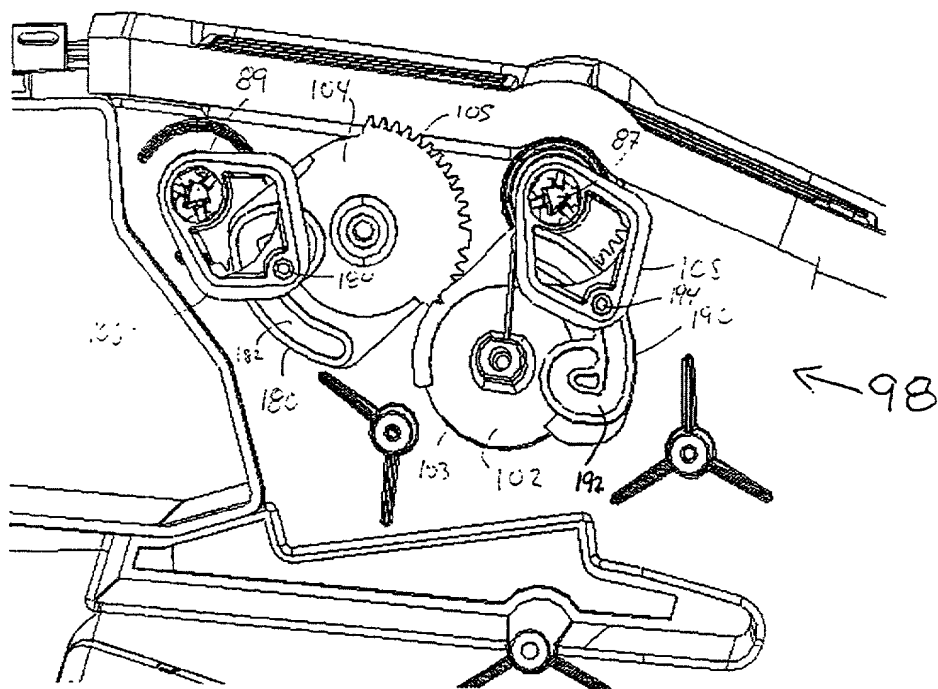


Fig. 6B

10079738 DEB 40


8/10



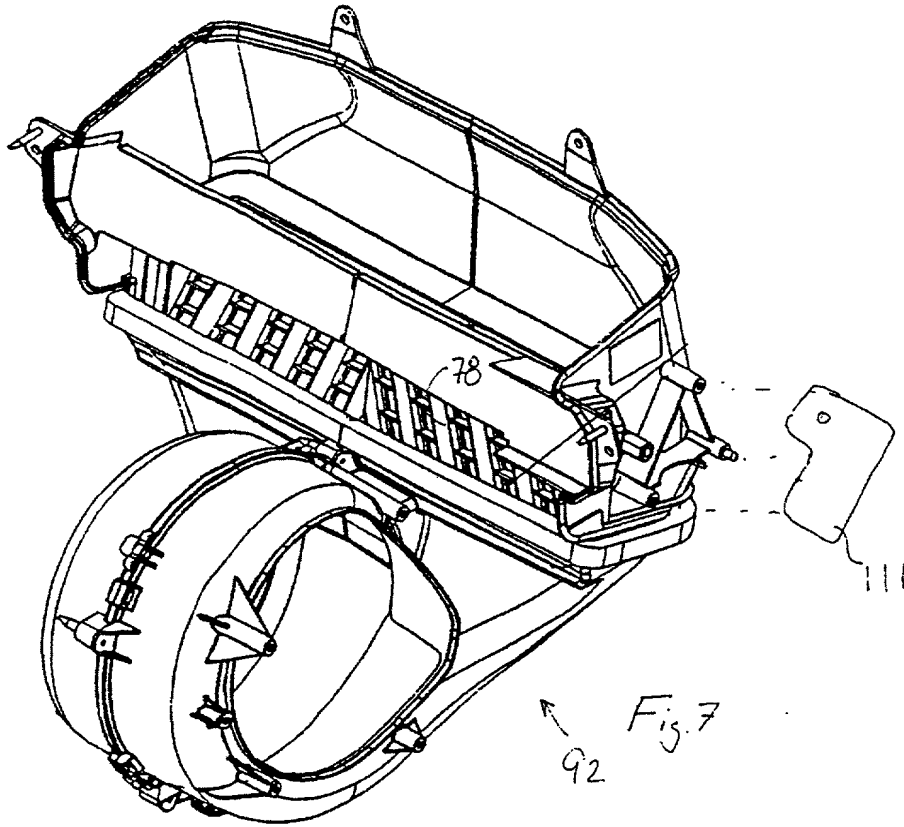

1009730 DEB 406

9/10

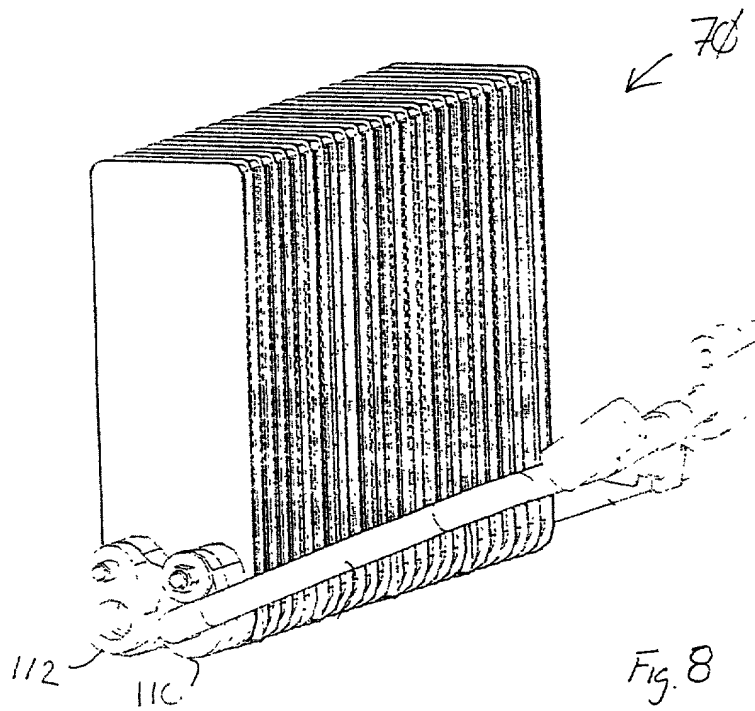

10/10

DRIVER CONTROL INPUTS

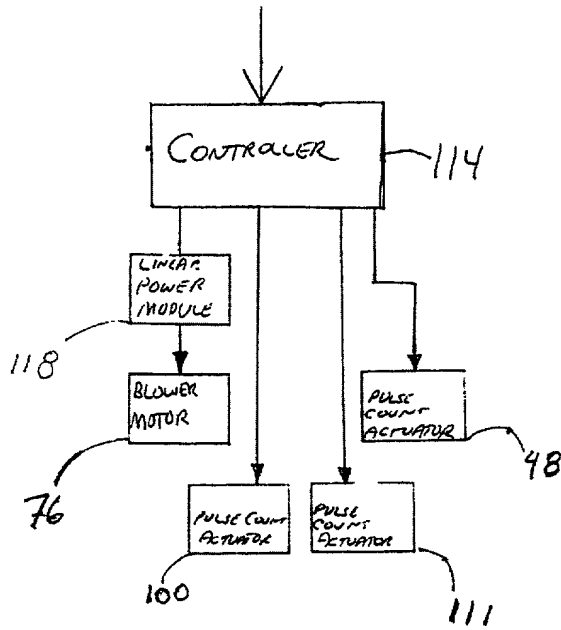


Fig. 10

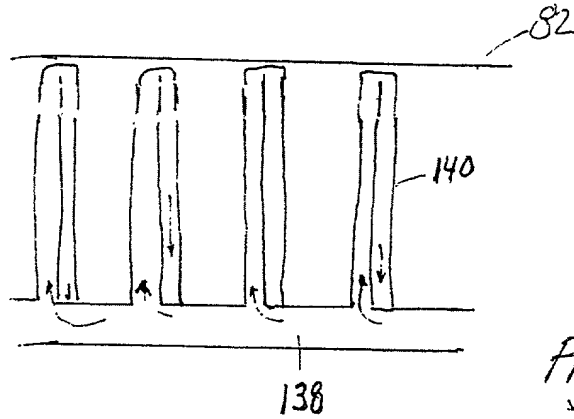


Fig. 9